




CONSTRUCTION SITES
EVENTS •
TEMPORARY SOLUTIONS

MOBILE SOLUTIONS

ACCESS CONTROL

MOBILE SWING GATE

FRIGG MOBILE BASIC HDG

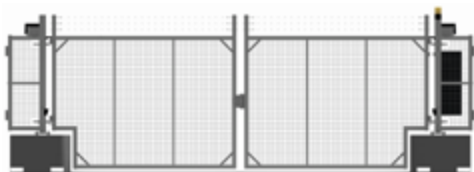

Motorized version in hot-dip galvanized execution.

Motorized swing gate for industrial and mobile entrances and exits. For locations with lower needs of opening speed and lower amount of openings/day (15-20 cycles).

BENEFITS

CONSTRUCTION

Halsang swing mobile swing gates are manufactured in HDG, welded steel construction. Available in motorized or manual version. The opening width is 5 m and the height is 2 m + 3 rows of barbed wire.

GATE WING

The gate wing filling consists of welded mesh 50x50x3 mm. Gate wings are made of square profiles 60x60x3 mm.

GATE POST

Gate posts made of square profiles 100x100x4 mm.

MOBILITY

The gates are installed on a strong and reinforced concrete foundation, prepared for being handled by forklifts. Each concrete foundation is integrated on a sturdy steel plate which provides good stability and durability. The gate posts are equipped with a fence connection for mobile fences.



ID06



MANUAL OR MOTORIZED

Frigg mobile basic is available in both motorized and manual version.

FEATURES

The gate is motorized with control Elka Zenit Drive 24V, soft start and soft stop for optimal operation. The electrical cabinet, in coated steel (RAL 9007), is mounted on the right gate post as standard (seen from the outside).

COMPLETELY PREASSEMBLED

The motorized swing gates are fully pre-assembled when delivered, allowing for easy and quick installation on site (plug and play). For manual design, the gates are prepared for padlock and is delivered with ground pin on each gate wing.

EXPERIENCE

Halsang has long experience in developing mobile access control solutions and we are constantly improving our products to meet customer requirements.

HIGH QUALITY

Our high quality products offer long lifetime, resulting in a financially sound investment for the customer.

For need/request of high frequent open/closing cycles we recommend Frigg Mobile HDG

OPTIONS

- Installation with various ID 06 systems on request
- Coated in RAL colors
- Halsang Monitoring System on request
- Induction loop detector (1 or 2-channel)
- Illumination of free passage

FEATURES

- Fully welded HDG steel construction
- Easy access for service and maintenance in the electrical cabinet (coated in RAL 9007)
- Opening width 5 m
- Height 2.0 m + 3 rows of barbed wire
- TÜV approved and in accordance with EN 13241-1

TECHNICAL DESCRIPTION

Power supply	230V AC, 50 Hz
Power consumption	10-16A
Operating environment	-25 ⁰ to +50 ⁰ C
Motorization	Elka Orbit Drive 24V, with soft start and soft stop
Electromagnetic lock.	Maximum load 500 kg
Safety features	1 pcs flashing warning light (orange) in accordance with EN standard 13241 2 pcs emergency stops

Technical support

Halsang offers technical support for all our access control products.

We reserve the right to make changes to technical specifications due to product development and / or to meet state requirements. © Halsängs Stängsel AB • Sweden • 2019



In accordance with EN
13241